




MAZER MAKİNA

YARI OTOMATİK L - YAPIŞTIRMA ve SHRINK AMBALAJ MAKİNALARI

SEMI AUTOMATIC L - SEALER SHRINK WRAPPING MACHINES

مکائن (شرینک) لف و تذلیف نصف اوتوماتیکیہ (L)

YARI OTOMATİK L - YAPIŞTIRMA ve SHRINK AMBALAJ MAKİNALARIN TEKNİK ÖZELLİKLERİ															
SEMI AUTOMATIC L - SEALER SHRINK WRAPPING MACHINES TECHNICAL SPECIFICATIONS															
خواص تكثيف مكائن (شرينة) لف و تغليف نصف أوتوماتيكية (L)															
Tip	ELEKTRİK BESLEME VOLTU (V) 220V-380V	MAX. GÜC (KW) 0.5	ORTALAMA GÜC KW/h 0.1	PAKETLEME ÖLÇÜLERİ CM 10x10x20	MAX. PAKETLEME YÜKSEKLİK AYARI (DAK.KADA) 0.5	YAPIŞTIRMA ZAMAN AYARI 0.5	SOĞUTMA ZAMAN AYARI 0.5	MANYETİK KAPAK KİLİDİ ÇIKIŞ AYARI 0.5	OTOMATİK TÜNEL İSİ AYARI 0.5	SHRINK TÜNEL İSİ AYARI 0.5	TÜP ÇENE AYARI 0.5	TÜNEL KONVEYÖR HIZ AYARI 0.5	ÇALIŞMA BASINCI (BAR) 0.5	MAKİNA BOYUTLARI CM 10x10x20	MAKİNA AĞIRLIĞI KG 10
Type	Electric Supply (V) Volt 220V-380V	Max. Power (kW) 0.5	Optimum Power (kWh) 0.1	Max. Packing Dimensions (cm) 10x10x20	Max. Sizes of Package Adjustment Height (Minutes) 0.5	Sealing Time Adjustment cm 0.5	Cooling Time Adjustment cm 0.5	Magnetic Closure Adjustment Conveyor Outlet 0.5	Automatic Tunnel Heat Adjustment 0.5	Tube Chn Tunnel Heat Adjustment 0.5	Tunnel Conveyor Speed Adjustment (Bar) 0.5	Air Supply (Bar) 0.5	Machine Dimensions cm 10x10x20	Machine Weight Kg 10	
الشكل	الطاقة الكهربائية (وات) 380	القدرة الكهربائية (كيلو واط) 0.5	الحجم الاجمالي (العرض، العرض، الارتفاع) (سم) 10x10x20	الحجم الاجمالي للطفلة (سم) 10x10x20	الحد الأقصى لعمليات التغليف في الدقيقة الواحدة (سم) 0.5	غير ارتفاع التغليف في الدقيقة الواحدة (سم) 0.5	الحد الأقصى للمسافة بين الأجزاء (سم) 0.5	متانة العلامة التجارية (سم) 0.5	غير الحرارة في المكان (درجة مئوية) 0.5	غير الحرارة في المكان (درجة مئوية) 0.5	غير السرعة في شريط النافذ (سم) 0.5	متانة الشفاف (سم) 0.5	متانة المحظوظ (سم) 0.5	وزن الجهاز (كيلوغرام) 10	
MT 40 X 50 M.S.A.	•	3	3	35X45X22	4	•	40X50	•	•	150X90X115	170				
MT 40 X 50 M.M.S.A.	•	6	3	35X45X22	4.5	•	40X50	•	•	150X90X115	170				
MT 40 X 50 P.S.A.	•	6	3	35X45X22	7-8	•	40X50	•	•	150X90X115	175				
MT 40 X 50 M.K.L.Y.	•	1	0.5	35X50X22	12-15	•	40X50	•	•	165X90X115	180				
MT 40 X 50 P.K.L.Y.	•	1	0.5	35X50X22	15-20	•	40X50	•	•	165X90X115	185				
MT 40 X 50 M.K.L.Y.T.	•	6	3	35X50X22	8-10	•	40X50	•	•	245X100X115	315				
MT 40 X 50 P.K.L.Y.T.	•	6	3	35X50X22	10-15	•	40X50	•	•	245X100X115	320				
MT 40X50 P.K.L.Y.T.U.P ÇENE	•	9	4.5	35X50X22	15-20	•	40X50	•	•	245X100X115	320				
MT 50 X 60 M.S.A.	•	6	3	45X50X22	4.5	•	50X60	•	•	175X105X115	205				
MT 50 X 60 P.S.A.	•	6	3	45X50X22	7-8	•	50X60	•	•	175X105X115	215				
MT 50 X 60 M.K.L.Y.	•	1	0.5	50X60X22	12-15	•	50X60	•	•	185X100X115	195				
MT 50 X 60 M.K.L.Y.T.	•	6	3	50X60X22	8-10	•	50X60	•	•	300X110X155	415				

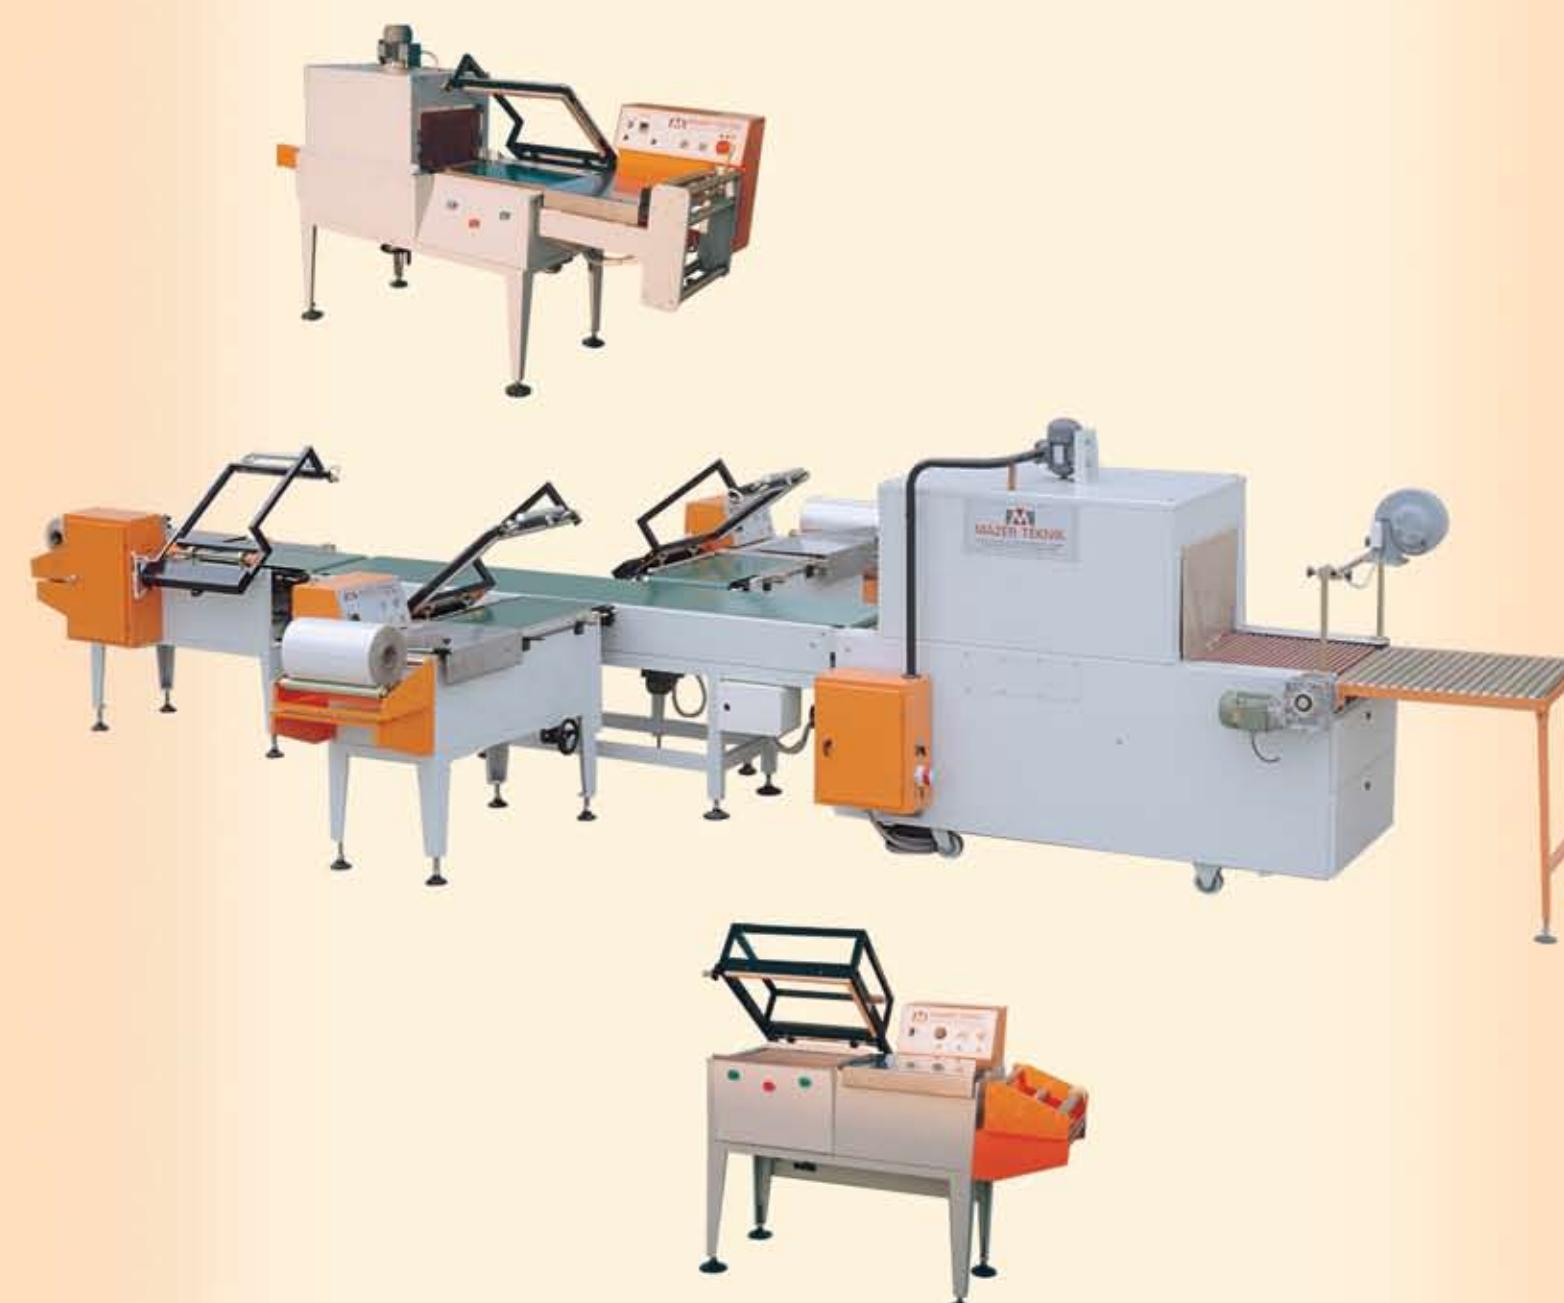

YARI OTOMATİK L - YAPIŞTIRMA ve SHRINK AMBALAJ MAKİNALARIN TEKNİK ÖZELLİKLERİ												
SEMI AUTOMATIC L - SEALER SHRINK WRAPPING MACHINES TECHNICAL SPECIFICATIONS												
خواص تكثيف مكائن (شرينك) لف وتفليف نصف (أوتوماتيكية) (ل)												
ELEKTRİK BESLEME VOLTU 220V-380V	MAX. GÜC (KW) 220V 380V	ORTALAMA GÜC kWh	PAKİETLEME ÖLÇÜLERİ CM	MAX. PAKETLEME DAKKADA YÜKSEKLİK AYARI	MAX. YAPIŞTIRMA ZAMAN AYARI CM	SOĞUTMA ZAMAN AYARI KAPAK KİLİDİ	MANYETİK KONVEYÖR ÇIKIŞ AYARI	OTOMATİK KONVEYÖR ÇIKIŞ AYARI	SHRINK TÜNEL İSİ AYARI	TÜNEL KONVEYÖR HİZ AYARI	CALISMA BASINCI (BAR)	MAKİNA BOYUTLARI CM
ELECTRIC SUPPLY (V) VOLT 220V-380V	MAX. POWER (KW) OPTIMUM POWER KWH	MAX. PACKING DIMENSIONS CM	MAX. SIZES OF PACKAGE ADJUSTMENT (MINUTES)	MAX. PACKING HEIGHT ADJUSTMENT	MAX. SEALING TIME ADJUSTMENT	COOLING TIME ADJUSTMENT	MAGNETIC CLOSURE	AUTOMATIC CONVEYOR OUTLET	SHRINK TUNNEL HEAT ADJUSTMENT	TUNNEL CONVEYOR SPEED ADJUSTMENT	AIR SUPPLY (BAR)	MACHINE DIMENSIONS CM
الطاقة الكهربائية (وات) فولت (ك، بـ، جـ) الطاقة الكهربائية (وات) فولت (ك، بـ، جـ)	القدرة الاعلى للمادة (وات)	القدرة الاعلى للمادة (وات)	الحجم الاعلى للمادة (ك، وـ)	الحجم الاعلى للمادة (ك، وـ)	الحجم الاعلى للمادة (ك، وـ)	الحجم الاعلى للمادة (ك، وـ)	الحجم الاعلى للمادة (ك، وـ)	الحجم الاعلى للمادة (ك، وـ)	الحجم الاعلى للمادة (ك، وـ)	الحجم الاعلى للمادة (ك، وـ)	الحجم الاعلى للمادة (ك، وـ)	
الطاقة الكهربائية الاعلى للمادة (كـ، جـ، بـ)	القدرة الاعلى للمادة (كـ، جـ، بـ)	الحجم الاعلى للمادة (كـ، جـ، بـ)	الحجم الاعلى للمادة (كـ، جـ، بـ)	الحجم الاعلى للمادة (كـ، جـ، بـ)	الحجم الاعلى للمادة (كـ، جـ، بـ)	الحجم الاعلى للمادة (كـ، جـ، بـ)	الحجم الاعلى للمادة (كـ، جـ، بـ)	الحجم الاعلى للمادة (كـ، جـ، بـ)	الحجم الاعلى للمادة (كـ، جـ، بـ)	الحجم الاعلى للمادة (كـ، جـ، بـ)	الحجم الاعلى للمادة (كـ، جـ، بـ)	
10 M.S.A.	•	3	3	35x45x22	4	•	40x50	•	•	•	•	150x90x115
10 M.M.S.A.	•	6	3	35x45x22	4-5	•	40x50	•	•	•	•	150x90x115
10 P.S.A.	•	6	3	35x45x22	7-8	•	40x50	•	•	•	•	150x90x115
10 M.K.L.Y.	•	1	0.5	35x50x22	12-15	•	40x50	•	•	•	•	165x90x115
10 P.K.L.Y.	•	1	0.5	35x50x22	15-20	•	40x50	•	•	•	•	165x90x115
10 M.K.L.Y.T.	•	6	3	35x50x22	8-10	•	40x50	•	•	•	•	245x100x115
10 P.K.L.Y.T.	•	6	3	35x50x22	10-15	•	40x50	•	•	•	•	245x100x115
KLYTTÜP ÇENE	•	9	4.5	35x50x22	15-20	•	40x50	•	•	•	•	245x100x115
10 M.S.A.	•	6	3	45x50x22	4	•	50x60	•	•	•	•	175x105x115
10 M.M.S.A.	•	6	3	45x50x22	4-5	•	50x60	•	•	•	•	175x105x115
10 P.S.A.	•	6	3	45x50x22	7-8	•	50x60	•	•	•	•	175x105x115
10 M.K.L.Y.	•	1	0.5	50x60x22	12-15	•	50x60	•	•	•	•	185x100x115
10 P.K.L.Y.	•	1	0.5	50x60x22	15-20	•	50x60	•	•	•	•	185x100x115
10 M.K.L.Y.T.	•	6	3	50x60x22	8-10	•	50x60	•	•	•	•	300x110x155
10 P.K.L.Y.T.	•	6	3	50x60x22	10-15	•	50x60	•	•	•	•	300x110x155
KLYTTÜP GENÉ	•	9	4.5	50x60x22	15-20	•	50x60	•	•	•	•	300x110x155

Ankara Asfaltı 22.km Uluçak - Kemalpaşa - İZMİR / TÜRKİYE Tel: +90 232 877 03 12 (pbx) Fax: +90 232 877 03 15 web: www.mazermakina.com.tr e-mail: info@mazermakina.com.tr

The image displays four different models of shrink-wrapping machines arranged in a grid. The top-left machine is labeled '304 Kalite Paslanmaz Çelik MT 50 x 60 M.M.S.A.' and features a large horizontal work surface and a vertical shrink tunnel. The top-right machine is labeled '304 Kalite Paslanmaz Çelik MT 50 x 60 M.M.S.A.' and has a similar design. The bottom-left machine is labeled '304 Kalite Paslanmaz Çelik MT 40 x 50 M.K.L.Y.T.' and includes a conveyor belt system. The bottom-right machine is labeled '304 Kalite Paslanmaz Çelik MT 50 x 60 P.K.L.Y.T.' and also features a conveyor belt. Below the machines, there are three callout boxes. The first box on the left, titled 'SHRINK AMBALAJININ KULLANILDIĞI YERLER', lists various industries. The second box in the center, titled 'APPLICATIONS OF SHRINK PACKING SYSTEM', lists specific retail and production sectors. The third box on the right contains two statements about customization.

SHRINK AMBALAJININ KULLANILDIĞI YERLER

- Pastaneler
- Fırınlar
- Marketler
- Kozmetikçiler
- Kuruyemiş İmalatçıları
- Şekerciler
- Plastikçiler
- Oyuncakçılar
- Kırtasiyeciler
- İmalatçılar
- Toptancılar

APPLICATIONS OF SHRINK PACKAGING SYSTEM

- Pastry Shop
- Bakery
- Shops
- Cosmetic Stores
- Dried Fruits Production
- Confectioner
- Plastic Manufacturer
- Toys Manufacturer
- Stationer
- Manufacturer
- Wholesalers

ADVANTAGES OF SHRINK WRAPPING

- *Shrink Wrapping is a modern, cost effective packaging method involving the application of loose PVC polyolefin film sleeve around single collated products.*
- **RAPID and CHEAP WRAPPING**
About 50-80 % saving over carton wood and other packaging materials.
- **RIGIDITY and STRENGTH in PACKAGING**
Polyolefin film wraps the products tightly in turn.
- *Products easily recognized*
- *Easy handling*
- *Easy counting*
- *Lightweight*
- *Convenient to store*

**304 Kalite
Paslanmaz
Çelik
MT 50 x 60 M.M.S.A.**

**304 Kalite
Paslanmaz
Çelik
MT 50 x 60 M.M.S.A.**

**304 Kalite
Paslanmaz
Çelik
MT 40 x 50 M.K.L.Y.T.**

**304 Kalite
Paslanmaz
Çelik
MT 50 x 60 P.K.L.Y.T.**



MT 40 x 50 M.S.A.



MT 50 x 60 M.S.A.



MT 40 x 50 M.K.L.Y.T.



MT 50 x 60 M.K.L.Y.T.



MT 40 x 50 P.K.L.Y.



MT 50 x 60 P.K.L.Y.



MT 40 x 50 M.M.S.A.



MT 50 x 60 M.M.S.A.



MT 40 x 50 M.K.L.Y.



MT 50 x 60 M.K.L.Y.



MT 40 x 50
MANYETİK
KONVEYÖRLÜ
3 L.Y.T.



MT 40 x 50
PNOMATİK
KONVEYÖRLÜ
3 L.Y.T.



MT 40 x 50 P.S.A.



MT 50 x 60 P.S.A.



MT 40 x 50 P.K.L.Y. T.TÜP ÇENE



MT 50 x 60 P.K.L.Y. T.TÜP ÇENE



MT
PNOMATİK YUVARLAK
KESME

