


**YARI OTOMATİK SHRİNK MAKİNALARIN TEKNİK ÖZELLİKLERİ**  
SEMI AUTOMATIC SHRINK MACHINES TECHNICAL SPECIFICATIONS

TİPİ/TYPE	MT 1300 Y.O.	MT 1600 Y.O.
ELEKTRİK BESLEME (V) ELECTRIC SUPPLY (V)	380 V - 50 Hz - 3 ph	380 V - 50 Hz - 3 ph
MAX. GÜÇ kw MAX. POWER kw	22	25
ORTALAMA GÜÇ kw/h AVERAGE POWER kw/h	11	12
MAX. PAKET YÜKSEKLİĞİ mm MAX. PACKING HEIGHT mm	350	350
MAX. PAKETLEME ÖLÇÜLERİ mm MAX. PACKING DIMENSIONS mm	800	1100
MAX. PAKETLEME dakika MAX. PACKING PACKPER minutes	3-6	3-6
MAX. YAPIŞTIRMA ÇENE UZUNLUĞU mm MAX. SEALING BAR LENGHT mm	1400	1750
YAPIŞTIRMA ZAMAN AYARI SEALING TIME ADJUSTMENT	Standard	Standard
SOĞUTMA ZAMAN AYARI COOLING TIME ADJUSTMENT	Standard	Standard
SHRİNK TÜNELİ İSİ AYARI SHRINK TUNNEL HEAT ADJUSTMENT	Standard	Standard
TÜNEL KONVEYÖR HIZ AYARI TUNNEL CONVEYOR SPEED ADJUSTMENT	Standard	Standard
HAVA TÜKETİM MİKTARI Lt/dak. MAX. AIR CONSUMPTION Lt/min.	100	100
ÇALIŞMA BASINCI bar AIR SUPPLY bar	6	6
MAX. FİLM KALINLIĞI mikron MAX. FILM THICKNESS micron	150	150
MAX. RULO GENİŞLİĞİ mm MAX. REEL WIDHT mm	1300	1600
UYGUN FİLM SUITABLE FILMS	Polietilen (PE)	Polietilen (PE)
MAKİNA BOYUTLARI mm MACHINE DIMENSIONS mm	L x W x H	6000 x 2000 x 2000
ÇALIŞMA YÜKSEKLİĞİ (AYARLANABİLİR) mm WORKING DIMENSIONS (ADJUSTABLE) mm	850 - 900	850 - 900

Firmamız, Teknik Değerleri Değiştirme Hakkını Saklı Tutar / Our Company Keep The Right, to Change The Values.

Y.O.: Yarı Otomatik Shrink Makinası / Semi Automatic Shrink Machine

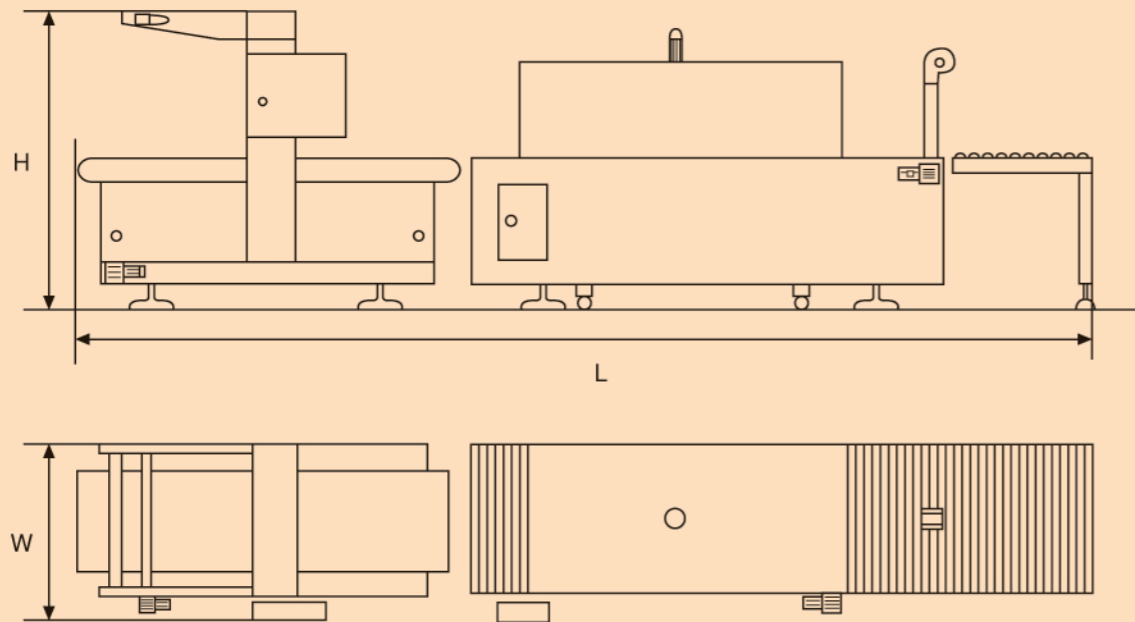

MAZER MAKİNA POLİÜRETAN KAROSER San. ve Tic. Ltd. Şti.


Ankara Asfaltı 22.km. Ulucak - Kemalpaşa - İZMİR / TÜRKİYE

Tel: +90 232 877 03 12 (pbx) Fax: +90 232 877 03 15 web: www.mazermakina.com.tr e-mail: info@mazermakina.com

# MAZER MAKİNA

YARI OTOMATİK SHRİNK AMBALAJ MAKİNALARI

SEMI AUTOMATIC SHRINK WRAPPING MACHINES

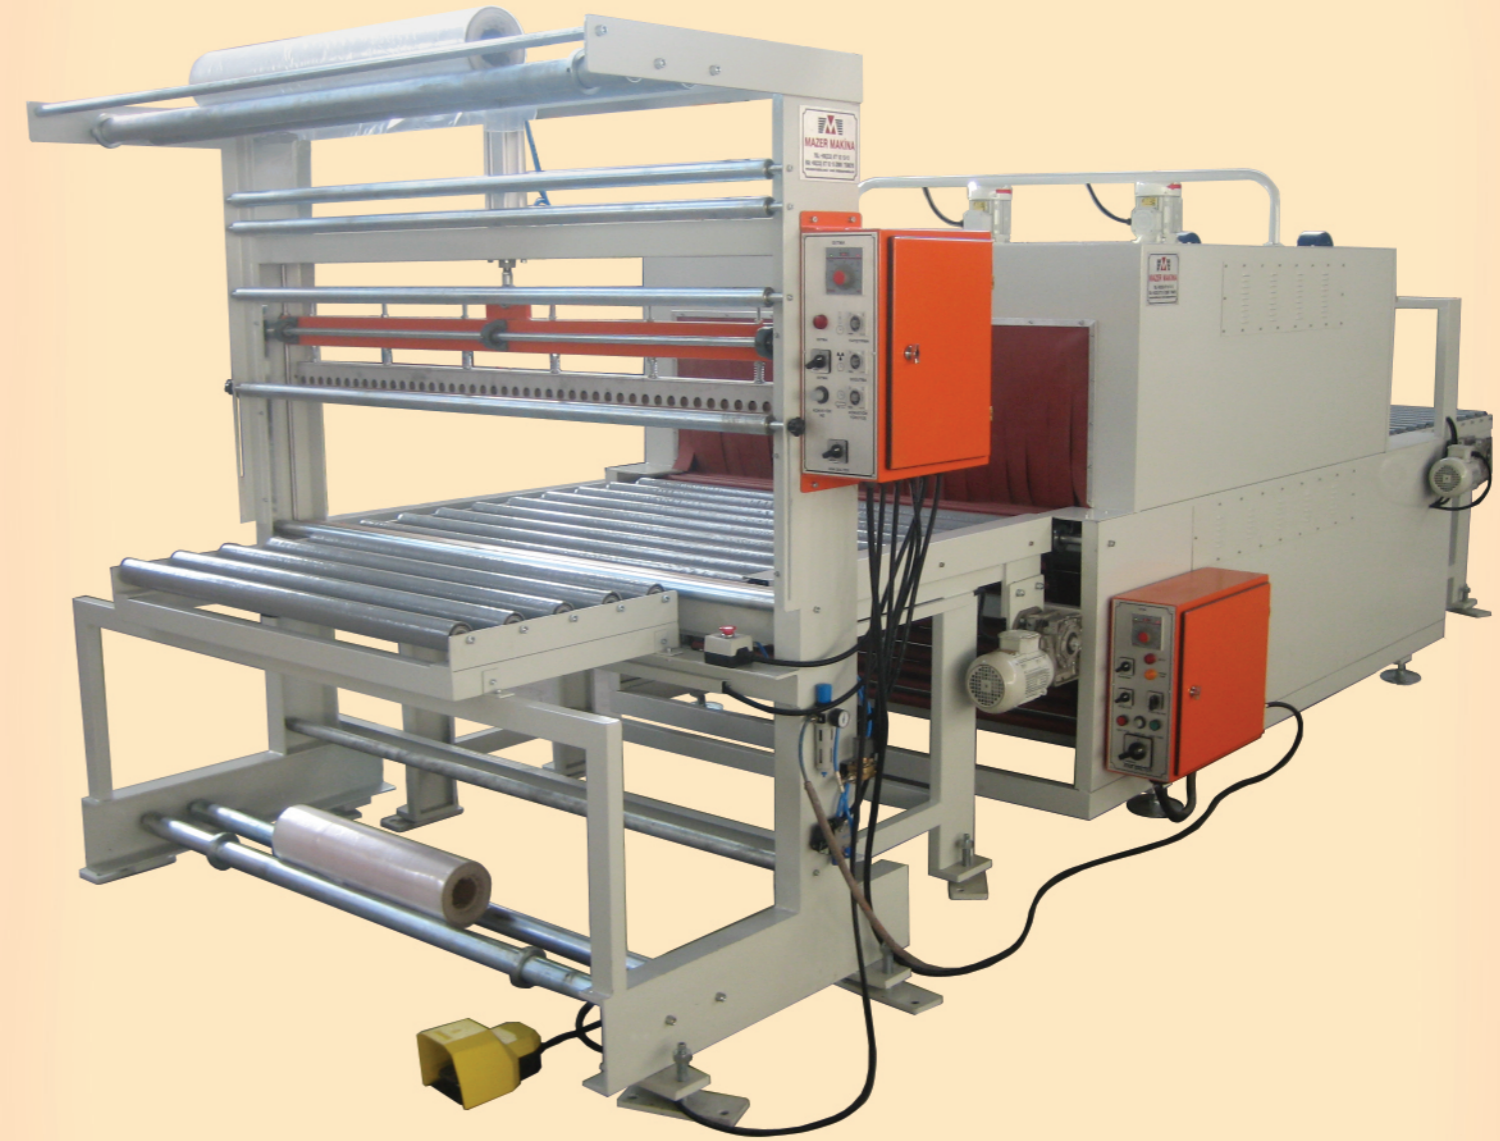





**MT 2500 TAM OTOMATİK SHRINK MAKİNASI**  
MT 2500 Full Automatic Shrink Wrapping Machine

**ADVANTAGES OF SHRINK WRAPPING**

- The machine wraps the products coming from front loading conveyor, with PE (polyethylene) film. After sealing products sent to the tunnel for shrinking process.
- Shrink Wrapping is a modern, cost effective packaging method involving the application of a loose polyethylene film sleeve around single or collated products.
- **RAPID and CHEAP WRAPPING**  
About 50-80 % saving over carton, timber and other packaging materials.
- **RIGIDITY and STRENGTH in PACKAGING**  
Polyethylene wraps the products tightly in tunnel
- Products easily recognized
- Easy handling
- Easy counting
- Lightweight
- Saving in Labour

**SHRINK AMBALAJININ AVANTAJLARI**

- Besleme bantından gelen ürünleri P.E (polietilen) filmiyle sararak yapıştırır ve tünele göndererek shrinkleme yapar.
- Ürünleri polietilen filmle kaplama modern ve etkin bir ambalajlama yöntemidir.
- **SERİ ve EKONOMİK AMBALAJLAMA**  
Koli, karton ve tahta ambalaja göre %50 ile %80'e varan ucuzluk.
- **SIKI ve SAĞLAM AMBALAJLAMA**  
Kullanılan polietilen film tünelde paketlenen malzemeleri sıkıkar.
- Malın tanınmasına yardımcı olur.
- Kolay taşınır.
- Sayımı kolaylaştırır.
- Hafiftir.
- Personel sayısını azaltır.

**MT 1300 TAM OTOMATİK SHRINK MAKİNASI**  
MT 1300 Full Automatic Shrink Wrapping Machine

